

Switching Power Supply Type SP D 24-10 DIN Rail mounting



SPD

- Universal AC Input Full range
- Installation on DIN Rail 7.5 or 15mm
- Short circuit protection
- Overload protection
- High efficiency
- LED indicator for power on
- Led indication for DC low
- Internal input filter
- CE, TUV approved and cULus Listed

Product Description

The Switching power supplies SPD series are specially designed to be used in all automation application where the


Installation is on a DIN rail and compact dimensions and performance are a must.

Approvals



Ordering Key

SP D 24 10 1 B

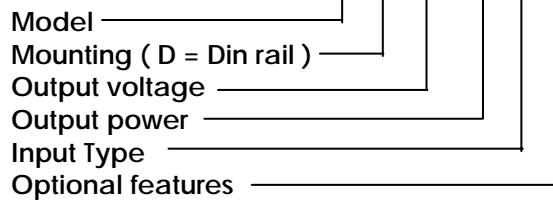

Input type : 1= single phase

Optional Features

Description	Code
Spring connectors	B

Output data

Output nominal voltage	24Vdc*	Transient recovery time	300µs
Current	420mA	Ripple and noise	50mVpp
Output voltage range	-10 to +20% of rated V.	Efficiency typ.	76%
Line regulation	± 1%	Output Voltage accuracy	± 1%
Load regulation	± 2%	Temperature coefficient	± 0.02%/°C
		Hold up Time Vi = 115Vac	25ms
		Hold up time Vi = 230Vac	100ms

Input data

Rated input voltage	100 - 240	Frequency range	47 - 63Hz
Voltage range		Inrush current	
AC	90 - 265Vac	Vi = 115Vac	10A
DC	120 - 370Vdc	Vi = 230Vac	18A

* 5Vdc, 12Vdc and 15Vdc available upon request

Specifications are subject to change without notice



Vydas International Marketing
Swan House PBC Lynchborough Rd
Passfield Hampshire GU30 7SB UK

Tel: 44(0)1428 751822 Fax: 44(0)1428 751833
Email: info@vydas.co.uk Web: www.vydas.co.uk



Controls and Protections

Overload	110 – 135%	Output Short Circuit	Hiccup mode
Input Fuse	T2A/250Vac internal*	Dc out On, indicator	21.6Vdc
Overvoltage Protection	125 – 145%	Dc out low, indicator	18 – 21.6Vdc

General data (@ nominal line, full load, 25°C)


Ambient temperature	-10°C to 71°C	Cooling	Free air convection
Case temperature V/I nom	+85°C	Switching frequency	100kHz
Derating (>60°C to +71°C)	3%/°C	MTBF (MIL-HDBK-217F)	210.000h
Ambient humidity	20 - 95%RH	Case material	Plastic
Storage	-25°C to +85°C	Dimensions L x W x D	90 x 22.5 x 115
		Weight	120g

Approvals and EMC

Insulation voltage I / O	3.000Vac	CE	EN50081-1 / EN55022 Class B
Insulation resistance	100Mohm		
UL / cUL	UL508, UL60950-1, UL1310 Class 2 Recognised		EN50082-1 / EN55024 EN61000-3-2 EN61000-3-3
TUV	EN60950-1		

* fuse not replaceable by user

Block diagram

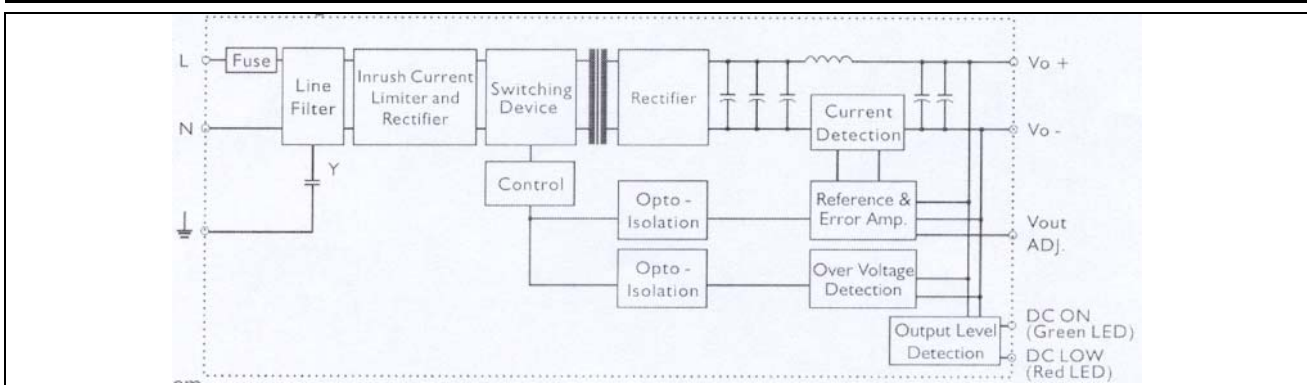


Pin assignement and front controls

Pin No.	Designation	Description
1	V+	Positive output terminal
2	V-	Negative output terminal
3	GND	Ground terminal to minimise High frequency emissions
4	N	Neutral input (no polarity with DC input)
5	L	Phase input (no polarity with DC input)
	Vout ADJ.	Trimmer for fine output voltage adjustment
	ON	DC output ready LED
	LO	DC low indicator LED


Specifications are subject to change without notice



Derating Diagram

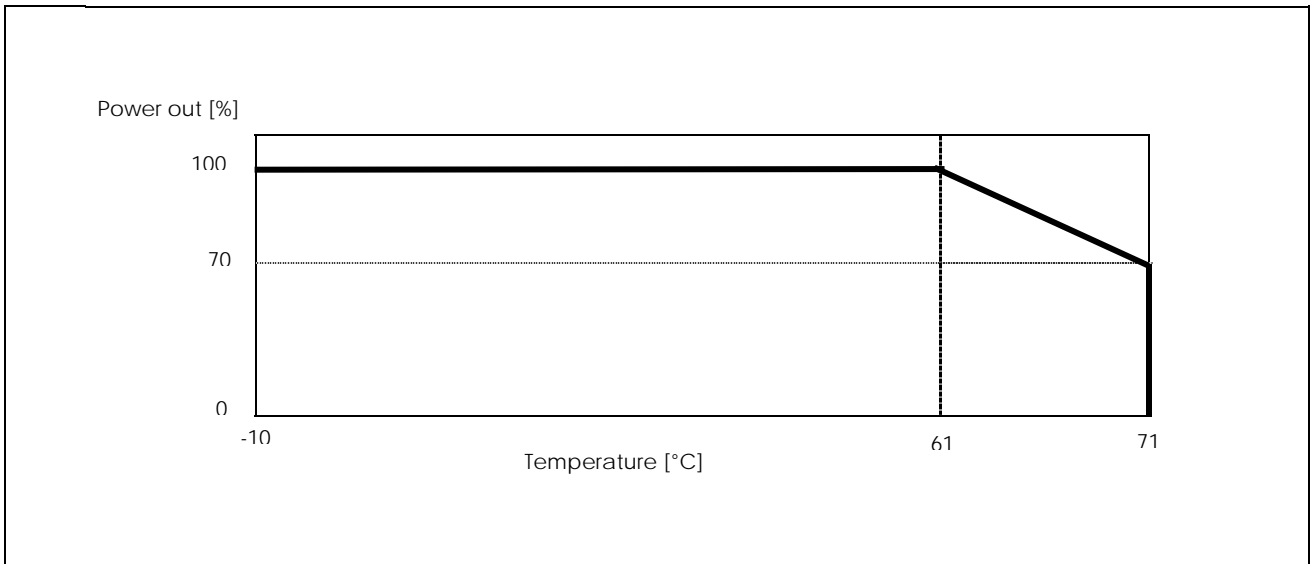

Mechanical Drawings

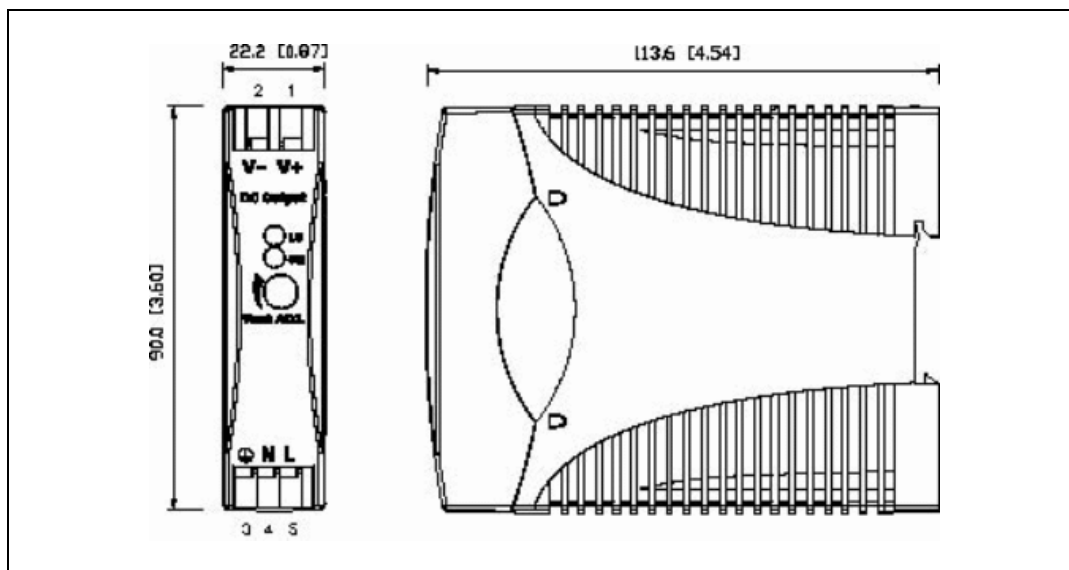

Installation

Ventilation and cooling	Normal convection All sides 25mm free space for cooling is recommended
Connector size range	Solid: 0.2 – 2mm ² (AWG24-14) (use copper conductors only)

Specifications are subject to change without notice