


**TAS50**

**Busbar window** 51x12.5mm  
**Secondary Terminals** M4 screws/fast-on connectors  
**Weight** 430g

Supplied with fixing feet and busbar mounting bracket




Option: Terminal cover

Primary current A	Burden		
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA
250	-	-	3
300	-	2	4
400	-	4	6
500	2	4	6
600	6	8	10
800	8	10	12
1000	10	12	15
1200	12	15	20
double ratio with secondary selection			
250-500	-	-	3-6
600-1200	6-12	8-15	10-20
1A or 5A secondary			

**TAS64**

**Busbar window** 64x11mm, 51x31mm  
**Secondary Terminals** M4 screws/fast-on connectors  
**Weight** 500g

Supplied with busbar mounting bracket




Option: Terminal cover  
 Fixing feet

Primary current A	Burden		
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA
250	-	2.5	4
300	-	3	5
400	-	4	6
500	2	4	6
600	4	6	8
700	6	8	10
750	6	8	10
800	6	8	10
1000	8	10	12
1200	10	12	15
1250	10	12	15
1500	10	12	15
1600	10	12	15
double ratio with secondary selection			
250-500	-	-	3-6
750-1500	6-10	8-12	10-15
1A or 5A secondary			

**TAS63**

**Busbar window** 64x19mm, 51x20mm, 41x21mm  
**Secondary Terminals** M4 screws/fast-on connectors  
**Weight** 720g

Supplied with busbar mounting bracket

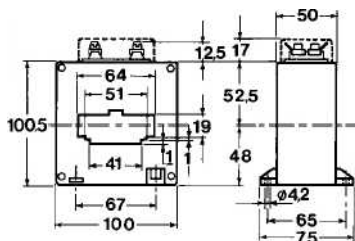


Option: Terminal cover  
 Fixing feet

Primary current A	Burden		
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA
150	-	1.5	5
200	-	3	8
250	2	5	-
300	3	6	-
400	6	12	-
500	6	12	-
600	10	20	-
800	12	25	-
1000	15	30	-
1200	20	40	-
1500	20	40	-
1600	20	40	-
double ratio with secondary selection			
150-300	-	1.5-6	-
750-1500	12-20	25-40	-
1A or 5A secondary			

**TAS65**

**Busbar window** 65x32mm  
**Secondary Terminals** Pillar screw terminals  
**Weight** 750g

Supplied with busbar mounting bracket



Option: Horizontal mounting (terminals on long side of CT - Ref TAS65H)

Primary current A	Burden		
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA
200	-	2	5
250	1	4	6
300	1.5	6	7
400	4	8	10
500	8	10	12
600	8	12	15
700	10	12	15
750	10	15	15
800	12	15	20
1000	15	20	25
1200	15	20	25
1250	15	20	25
1500	20	25	30
1600	20	25	30
2000	20	25	30
1A or 5A secondary			