


# TAS240



- Cable aperture : 3 @ 15.5x30mm
- Primary current : 60 to 160A
- Secondary terminals M4 Screws
- 25mm hole centres
- Terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 500g

### Dimensions

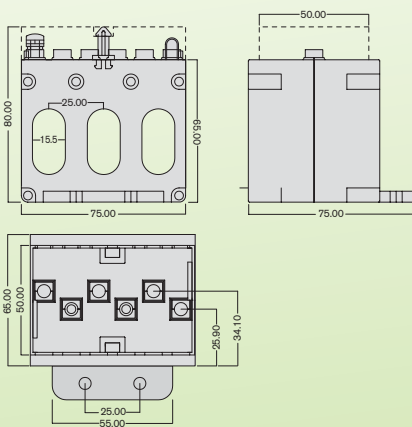

### Current Transformer Ratios


Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
5A Secondary				

### How to Order / Model Reference

eg **TAS240** 100 /5A


Model	TAS240				
Primary Current					
Select code from ratio table above		???			
Secondary Current					/5A

# TAS242

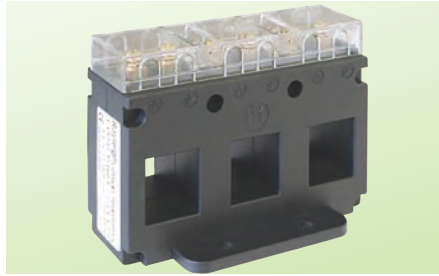

- Cable aperture : 3 @ 21x25mm
- Primary current : 60 to 250A
- Secondary terminals M4 Screws
- 35mm hole centres
- Terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 550g

### Dimensions

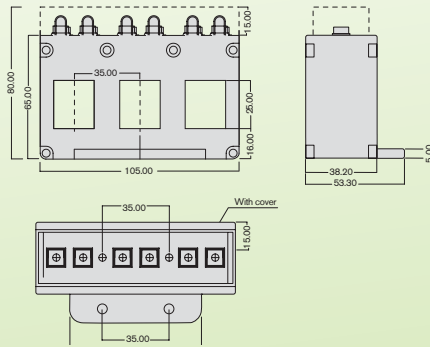

### Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
60	-	1.5	2.0	060
100	-	2.0	3.0	100
125	-	2.5	3.0	125
150	1.5	2.5	3.0	150
160	1.5	2.5	3.0	160
200	1.5	2.5	3.0	200
250	1.5	2.5	3.0	250
5A Secondary				


### How to Order / Model Reference

eg **TAS242** 125 /5A

Model	TAS242				
Primary Current					
Select code from ratio table above		???			
Secondary Current					/5A


DATA SHEET : XXXXX

# TAS248

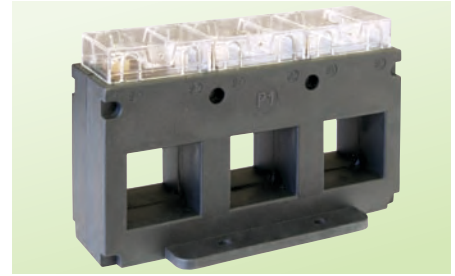

- Cable aperture : 3 @ 31x31mm
- Primary current : 250 to 630A
- Secondary terminals M4 Screws
- 45mm hole centres
- Terminal cover included
- Housing Material Self extinguishing Nylon IEC185 classification VO according to UL-94
- Weight : 680g

### Dimensions

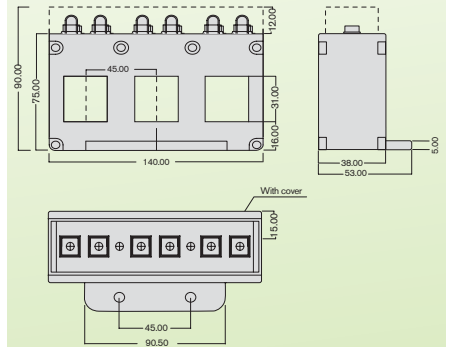

### Current Transformer Ratios

Primary Current	Burden			Code
	cl. 0.5 VA	cl. 1 VA	cl. 3 VA	
250	1.5	2.5	3.0	250
300	2.5	3.75	4.0	300
400	2.5	3.75	4.0	400
500	2.5	3.75	4.0	500
600	2.5	3.75	4.0	600
630	2.5	3.75	4.0	630
5A Secondary				

### How to Order / Model Reference

eg **TAS248** 125 /5A

Model	TAS248				
Primary Current					
Select code from ratio table above		???			
Secondary Current					/5A

DATA SHEET : XXXXX